


Surface Mount Terminal Strips with Push-Buttons

Series 2060

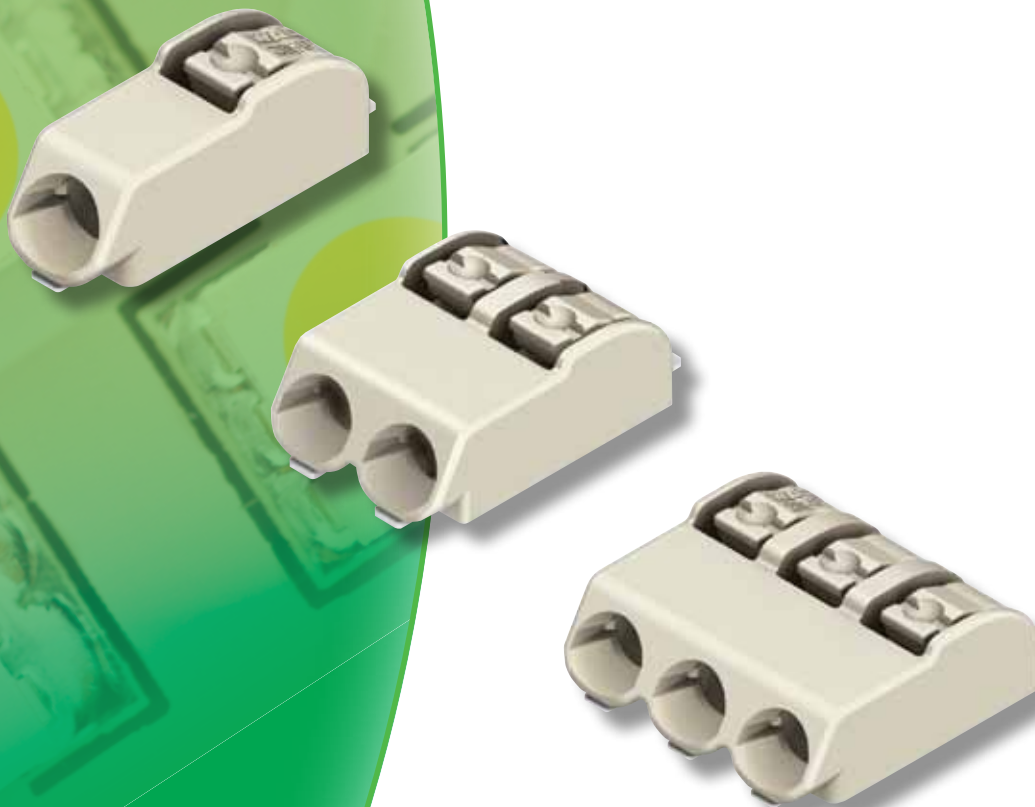

WAGO[®]
INNOVATIVE CONNECTIONS

Surface Mount Terminal Strips with Push-Buttons

Pin Spacing 4 mm

2060 Series



- Surface mount terminal strips with CAGE CLAMP®S connection and push-buttons
- Direct push-in of solid conductors
- Push button for connection of stranded conductors, and for removal of all wire types
- A total height of only 4.5mm helps minimize shadowing in LED applications
- Packaged in tape-and-reel for automated SMT processes
- Large flat area for easy pick-n-place
- Wiring ports with balcony design – creates "lead-in" for ease of wiring, even at a slight angle

Technical data:

Pin Spacing	1 Pole			2 - 3 Pole		
	4 mm 0.157 in			4 mm 0.157 in		
Rating per	IEC/EN 60664-1			IEC/EN 60664-1		
Overvoltage category	III	III	II	III	III	II
Pollution degree	3	2	2	3	2	2
Rated voltage	63 V	160 V	320 V	63 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV
Nominal current	9 A	9 A	9 A	9 A	9 A	9 A
Approvals per	UL 1977			UL 1977		
Rated voltage	600 V			250 V		
Nominal current UL	9 A			9 A		

Conductor data:


Connection technology	CAGE CLAMP®S
Conductor size: solid	0.20 - 0.75 mm ²
Conductor size: fine-stranded	0.20 - 0.75 mm ²
AWG	24 - 18
Strip length	6 - 7 mm / 0.24 - 0.28 in
Conductor entry angle	0° to PCB

Material data:

Material group	I
Insulating material	Glass fiber-reinforced polyphthalamide (PPA-GF)
Temperature stability	-35°C to +105°C
Flammability rating per UL 94	V0
Contact plating	tin-plated

Approvals are available online at: www.wago.com

For more technical information, see Full Line Catalog, Volume 2, Section 11

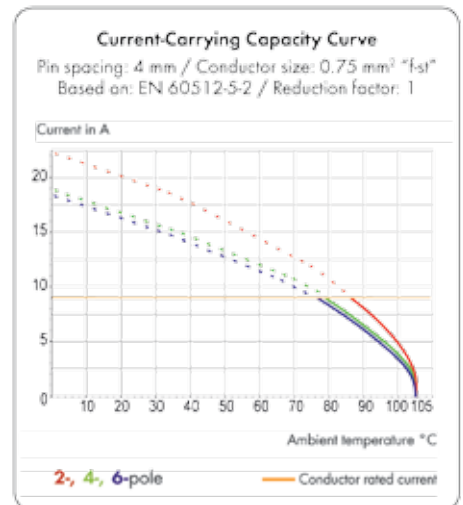


2060 Series accessories: Volume 2/Page:

Operating tools (233-335)	491
---------------------------	-----



Inserting solid conductors via push-in termination.






Inserting/removing fine-stranded conductors by lightly pressing on push-button (e.g., using a 233-335 operating tool or a ball point pen).






Surface Mount Terminal Strips with Push-Buttons 2060 Series

Pin spacing 4 mm / 0.157 in		Pin spacing 4 mm / 0.157 in		Pin spacing 4 mm / 0.157 in	
0.2 - 0.75 mm ²	AWG 24 - 18	0.2 - 0.75 mm ²	AWG 24 - 18	0.2 - 0.75 mm ²	AWG 24 - 18
160 V/2.5 kV/2 9 A	600 V/9 A	160 V/2.5 kV/2 9 A	250 V/9 A	160 V/2.5 kV/2 9 A	250 V/9 A

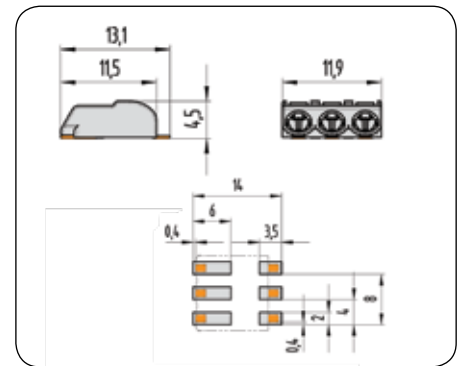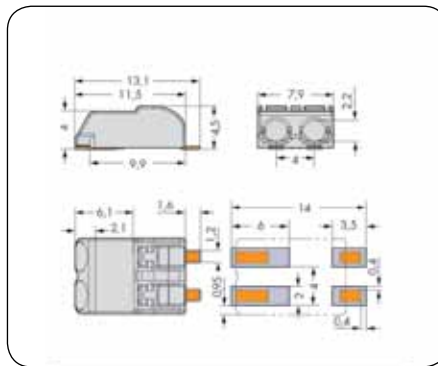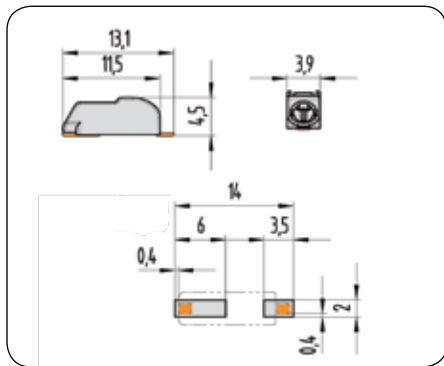

Pole No.	Item No.	Pack Unit/ Pieces per Reel	Pole No.	Item No.	Pack Unit/ Pieces per Reel	Pole No.	Item No.	Pack Unit/ Pieces per Reel
Surface mount terminal strip with push-buttons in tape-and-reel packaging, light gray*			Surface mount terminal strip with push-buttons in tape-and-reel packaging, light gray*			Surface mount terminal strip with push-buttons in tape-and-reel packaging, light gray*		
1	2060-401/998-404	1500	2	2060-402/998-404	1000	3	2060-403/998-404	750
Reel diameter: 330 mm			Reel diameter: 330 mm			Reel diameter: 330 mm		

*Depending on reflow soldering temperatures and times, color deviations may occur for light gray connectors. These deviations will have no impact on functionality.

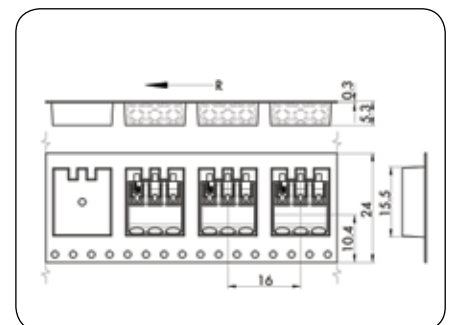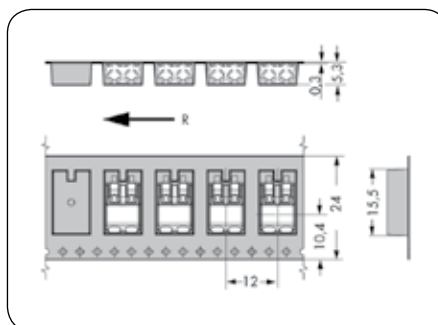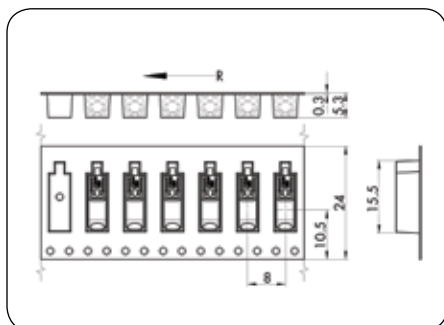

R = Feed Direction

WAGO Service Worldwide

Germany

WAGO Kontakttechnik
Minden
Tel. ++49/571/887/0
Fax ++49/571/887/169

Austria

WAGO Kontakttechnik
Wien
Tel. ++43/1/615/07/80
Fax ++43/1/615/07/75

Belgium

WAGO Kontakttechnik
Zaventem
Tel. ++32/2/7/17/90/90
Fax ++32/2/7/17/90/99

China

WAGO ELECTRONIC Co. Ltd.
Tianjin
Tel ++86/22/59617688
Fax ++86/22/59617668

England

WAGO, Ltd.
Rugby
Tel. ++44/1788/568008
Fax ++44/1788/568050

France

WAGO CONTACT S.A.
Paris
Tel. ++33/148172590
Fax ++33/148632520

Italy

WAGO ELETTRONICA SRL
Casalecchio di Reno (BO)
Tel. ++39/051/6132112
Fax ++39/051/6272174

Japan

WAGO Co. of JAPAN Ltd.
Tokyo
Tel. ++81/3/5627/2050
Fax ++81/3/5627/2055

Poland

WAGO ELWAG sp. z o. o.
Wroclaw
Tel. ++48/71/3604670/78
Fax ++48/71/3604699

Singapore

WAGO Electronic Pte. Ltd.
Singapore
Tel. ++65/62866776
Fax ++65/62842425

Switzerland

WAGO CONTACT SA
Domdidier
Tel. ++41/26/676/75/86
Fax ++65/26/676/75/01

Mexico

WAGO Corporation
Queretaro
Tel. 001/800/309/5975
+ 52/442/221/5946
Fax + 52/442/221/5063

Canada

WAGO Corporation
Tel. 800/DIN Rail (346-7245)
Fax 262/255-3232

WAGO Corporation
N120 W19129 Freistadt Road
Germantown, Wisconsin 53022
Telephone: 800 / DIN Rail (346-7245)
Fax: 262 / 255-3232
info.us@wago.com
www.wago.us

